



UNIVERSITÀ POLITECNICA DELLE MARCHE
Repository ISTITUZIONALE

How to create seismic risk scenarios in historic built environment using rapid data collection and managing

This is the peer reviewed version of the following article:

Original

How to create seismic risk scenarios in historic built environment using rapid data collection and managing / Quagliarini, E.; Lucesoli, M.; Bernardini, G.. - In: JOURNAL OF CULTURAL HERITAGE. - ISSN 1296-2074. - ELETTRONICO. - 48:(2021), pp. 93-105. [10.1016/j.culher.2020.12.007]

Availability:

This version is available at: 11566/289062 since: 2024-04-23T07:50:40Z

Publisher:

Published

DOI:10.1016/j.culher.2020.12.007

Terms of use:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. The use of copyrighted works requires the consent of the rights' holder (author or publisher). Works made available under a Creative Commons license or a Publisher's custom-made license can be used according to the terms and conditions contained therein. See editor's website for further information and terms and conditions.

This item was downloaded from IRIS Università Politecnica delle Marche (<https://iris.univpm.it>). When citing, please refer to the published version.

(Article begins on next page)

POSTPRINT OF Quagliarini E, Lucesoli M, Bernardini G (2021) How to create seismic risk scenarios in historic built environment using rapid data collection and managing. *Journal of Cultural Heritage* 48:93–105. <https://doi.org/10.1016/j.culher.2020.12.007>

How to create seismic risk scenarios in historical built environment using rapid data collection and managing

Enrico Quagliarini^{1,*}, Michele Lucesoli², Gabriele Bernardini³

*Corresponding author

¹ Department of Construction, Civil Engineering and Architecture (DICEA), Università Politecnica delle Marche, Ancona, Italy:
e.quagliarini@univpm.it

² Department of Construction, Civil Engineering and Architecture (DICEA), Università Politecnica delle Marche, Ancona, Italy:
m.lucesoli@pm.univpm.it

³ Department of Construction, Civil Engineering and Architecture (DICEA), Università Politecnica delle Marche, Ancona, Italy:
g.bernardini@staff.univpm.it

ABSTRACT:

The Historical Built Environment (HBE) is constantly prone to natural disasters because of its complexity. Resilience-increasing strategies in such a context should be defined at both preserving the cultural heritage and making the hosted communities safe. Earthquakes represent critical disasters because of the interactions between HBE elements (i.e.: buildings, open spaces, urban paths) and its inhabitants. Hence, the practical development of emergency plans and related risk reduction strategies should consider the induced effects of the earthquake on the HBE and the spatiotemporal variation in the number of exposed people. This goal needs propaedeutic methods to define relevant scenarios in view of the possible characterization of risk-related factors at the HBE scale. To this aim, this contribution tries to arrange a first sustainable, holistic, easy-to-use, and replicable framework. The paper innovatively provides planners with a unique scheme to reach available data from reliable sources concerning seismic hazard, vulnerability and damages, and exposure (i.e. related to human presences). Results on a case-study application (a typical Italian HBE) demonstrate the framework capabilities, by including the critical HBE damage-related conditions and crowding phenomena (in a multi-hazard perspective, based on the probable number and typologies of exposed individuals). Then, specific solutions can be advanced. The proposed holistic framework can be easily replicable

and adaptable due to the possibility to update the employed tools as well as to replace them with other existing and validated ones, giving the same inquired parameters as results. Hence, the methodological framework could constitute an effective support for risk scenarios creation at the HBE scale to be used in risk-assessment and emergency plans actions (e.g. basing on typological analyses on buildings/urban tissue, and simulation-based studies including human behaviours) by guaranteeing rapid data collection activities.

Keywords: Urban risk assessment, Historical Built Environment, Seismic risk, Data collection, Risk-reduction strategies, Urban emergency planning.

Highlights:

- A methodological framework to collect and manage seismic risk-affecting factors is developed;
- Wide-scale replicability for historic city centres is pursued;
- Factors to be evaluated, related data collection and organization are discussed;
- Historical Built Environment elements and their criticalities are inquired;
- Obtained framework constitutes the first step for effective simulation approaches.

1 Introduction

Natural disasters seriously affect cities and their community by causing serious threats to society as a whole, by affecting their building heritage as well [1]. A major risk is surely represented by Sudden-Onset Disasters (SUODs), which are “triggered by a hazardous event that emerges quickly or unexpectedly”¹. Recent real-world SUODs-related events have revealed how: 1) it is important to extend emergency management at a wider scale, rather than focusing on single buildings [2,3]; the current operational methods must be improved to face these emergencies [4]; strategies for rapid

¹ compare to the UNISDR definition given at <https://www.unisdr.org/we/inform/terminology> (last access: 06/07/2020)

1 data analysis and collection are useful to risk-assessment and mitigation actions to also deal with
2 multi-hazard conditions and other emerging topics on cities at risk (including climate change-related
3 disasters, e.g.: floods) [3,5–7].
4
5
6
7

8 In this general context and among the SUODs, earthquakes are surely one of the most critical for
9 the city safety and resilience, especially in historical contexts. In such scenarios, the specific features
10 of the Historical Built Environment (HBE) should be preserved since the HBE is intended as an
11 integral part of the cultural heritage [8]. Minimization criteria for risk-reduction interventions should
12 be combined with the conservation principles and the reduction of architectural heritage losses,
13 which contribute to the weakening of the communities' identity [8,9]. These scenarios are
14 conditioned by the interactions among the high-vulnerable buildings (generally, ancient masonry
15 constructions), their post-event modifications (i.e. damage levels), and the hosted community [9–
16 11]. Such interactions seriously affect the community's safety during the first emergency phases,
17 i.e. during the evacuation process (mainly involving the individuals who try to reach safe areas
18 where they can receive the rescuers' support) and in the immediate aftermath (e.g. first responders'
19 arrival and related actions in the earthquake-damaged scenario) [12–15]. Moreover, the seismic
20 HBE risk due to buildings vulnerability and compact urban tissue can be strongly increased, from a
21 multi-hazard perspective, depending on the HBE use, especially when crowding conditions are
22 present (e.g.: in conjunction with mass-gathering events or touristic destinations) [3,7,16,17].
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47

48 In general terms, the HBE can be defined as a network of (1) *buildings* (that could be *monumental*,
49 with historic-artistic-cultural features e.g.: *govern palaces, churches, monasteries, bell towers,*
50 *obelisks, theatres, castles, triumphal arches and arch bridges*, or *ordinary*, embodied by common
51 dwellings or modern public facilities [18]), (2) *open spaces* (that are the main urban voids, such as
52 squares) and (3) *urban streets* (connecting facing buildings to open spaces, which can be used as
53 paths by evacuees and rescuers to move into the earthquake-damaged scenario) [14,19–21]. In case
54
55
56
57
58
59
60
61
62
63
64
65

of an emergency, each of these elements can assume a strategic role [22–24]: (1) the *strategic buildings*, and (2) the *emergency areas* (hosted by open spaces), can host fundamental functions in the emergency scenarios, and they are linked together by (3) *strategic streets* and *evacuation paths* to be used by the population and the rescuers in the first emergency phases. Their seismic response, their mutual relationships and other aspects related to their use in ordinary conditions have to be collected because they could heavily influence the efficiency of the emergency plans [25,26].

The seismic risk of the HBE is conventionally composed of three components: Hazard (H), Vulnerability (V), Exposure (E) [27]. H relates to the expected event severity (in intensity or magnitude terms), within a given period, and is also connected to the topographical and soil characteristics of the site [28–31]. V is intended as its propensity to suffer damages during a seismic event, because of the HBE elements features (e.g. typological, construction-related, geometric) [32,33]. H and V factors are widely debated in literature and methods to collect data are well addressed and structured. Several works inquire how they can support the developed quantification methodologies in seismic risk scenario creation through the definition of influencing factors [34–36]. Furthermore, they are also included in some official guidelines and national regulations (e.g. [23]). Researches [37,38], including recent EU-Projects (e.g.: PERPETUATE [39] and Syner-G [40]), tried to develop reliable methodologies for V and related damage assessment. Nevertheless, their application seems to generally need significant efforts by designers (e.g. technicians of local administrations), who may be untrained and therefore unable to apply them (e.g. fragility curves). Quick methodologies based on Macroseismic approaches were previously developed and validated to move towards less time-consuming efforts both in data collection and in methodologies application by designers [1,41]. For this reason, they could be useful for quick HBE applications towards emergency simulation, preparedness and planning [13].

Finally, **E is** mainly oriented towards the human presence in the scenarios (e.g. to determine the impact in terms of human losses) [26,42]. It seems to be limitedly included in main research activities [43], e.g. due to the complexity in **codifying human presences** in the scenarios and behavioural issues (e.g. population risk awareness and response) [14,19,27].

Few studies **tried** to develop a methodology able to combine all the factors from a holistic point of view [21,44–48], quantifying the seismic risk of the HBE as a whole. Some others instead **were** oriented on a single part of the urban system such as open spaces [21] or paths networks [20]. Hence, it is essential to promote a unique **framework** or a guideline on how to collect and manage data for risk scenarios creation, by: **1) jointly considering the** aforementioned factors [32,47,49–51], **2) relating** them to the specific HBE **elements, and 3) focusing** on those that play a fundamental role in emergency conditions [22,23,52,53].

Databases from national statistical organizations allow retrieving many of the needed data (e.g.: building construction age, number of floors, structure type, hosted inhabitants) by including an urban-scale oriented approach. Recent works tried to provide bases for survey methodologies by jointly leading to buildings vulnerability and exposed population assessment towards emergency scenarios definition [42]. However, other requested data (e.g.: on evacuation procedures, mass gathering events) are more difficult to be obtained and they require specific collection methodologies or field surveys [13,26,54,55]. **Such frameworks can make designers prone** to leave out their evaluations where sources do not permit **them to** answer certain requests.

2 Research aim

This research is aimed at creating a unique methodological framework for scenarios creation of HBE prone to earthquakes, by jointly combining the risk-affecting components (i.e.: hazard, vulnerability, and exposure) from a holistic standpoint.

The novel proposed framework adopts specific literature-based methods in a combined, cooperative, and structured way. According to adaptability criteria, these methods are not exclusive, but they could be replaced by other existing and validated ones. Quick methods collecting data from easily available data sources are preferred to: 1) avoid costly in situ surveys; and 2) permit to reproduce the workflow by non-expert technicians. Reliable vulnerability assessment methodologies and damage state predictive algorithms are combined to quickly assess the impact of hazard conditions. Specific attention is paid to exposure issues, by introducing different HBE users' typologies (i.e. inhabitants, tourists), also considering time-dependent variations. In this sense, the framework provides the possibility to rapidly detect possible peak scenarios by overlapping ordinary conditions to mass gathering events from a multi-hazard point of view.

This way, this work constitutes a supporting tool for risk-assessment and emergency planning (e.g.: also towards the adoption of simulation-based methodologies).

3 Methodological framework

Figure 1 summarizes a consolidated methodological framework [20,56] to collect and manage data and dependencies between the scenario creation tasks (as the core of the work), in view of the three basic components (seismic hazard, vulnerability and layout, exposure assessment). This framework is oriented towards the application of existing methods for risk-assessment tools (i.e. simulation-based ones) [13,26,42]. In the following, for each factor of the framework core (grey areas concerning basics and advanced scenario creation tasks) reported in Figure 1, the data collection and management methods are discussed by introducing the main related works. The methodology is applied to an Italian case study (see Section 3.5). Hence, some specific data sources and regulations concerning the Italian case-study are evidenced in the methodologies description.

Nevertheless, the overall framework can be applied to other Countries depending on the specific national sources.

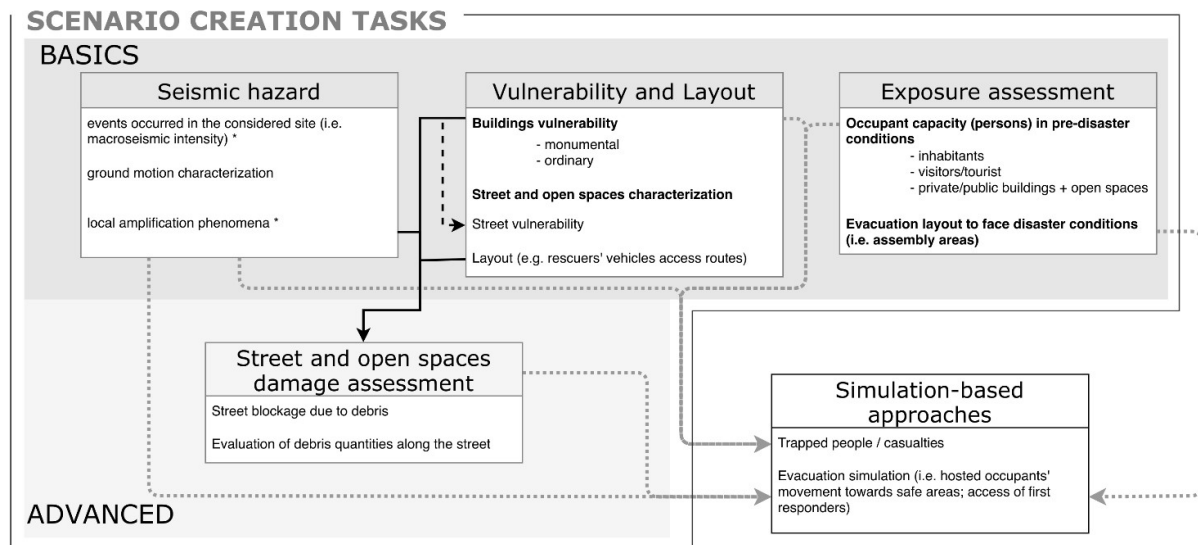


Figure 1 Dependencies between the scenario creation factors (including the related tasks) and the application of retrieved data in simulation-based and planning approaches. Dependencies are distinguished by: internal to each factor (black dashed line); producing data for another factor (black continuous line); providing data for the simulation-based approaches (grey dotted line).

3.1 Seismic hazard: possible earthquakes occurrence

Seismic Hazard data should be chosen to define probable earthquake emergency scenarios. According to this standpoint, the adoption of hazard values can take advantage of statistical data concerning historic seismic events that occurred in the considered site. In this term, they can be easily described in terms of macroseismic intensity (MCS). Global, national, and regional networks recording earthquakes provide the database that can be used to this end². The selection of significant seismic intensity values can be preferred if combined with the application of rapid building vulnerability assessment methods [57]. However, other damage prediction algorithms

² e.g.: at European Level <https://www.emsc-csem.org/#2> ; in Italy INGV emidius.mi.ingv.it/CPTI15-DBMI15/ ; for USA, the "Search Earthquake Catalog" of the USGS <https://earthquake.usgs.gov/earthquakes/search/> or the "Northern California Earthquake Data Center" <http://ncedc.org/anss/catalog-search.html> finally, <https://www.usgs.gov/natural-hazards/earthquake-hazards/monitoring> (last access: 06/07/2020)

1 require moment magnitude (Mw). The conversion from MCS to Mw can be qualitatively obtained
2 according to [58].
3
4

5 6 3.2 Vulnerability and layout 7 8

9 The analysis of the HBE can be essentially associated with the characterization of buildings and open
10 spaces/streets network [59,60]. Buildings vulnerability assessment methods can focus on the single
11 structural unit or the whole building aggregate [1]. The typological classification given in Section 1
12 that distinguishes ordinary buildings from the monumental ones is adopted [18]. Monumental
13 buildings and the medieval urban tissue identification can be supported by the evaluation of the
14 HBE evolution during the time (by available historical maps, e.g. Cadastral maps, General Land Office
15 [61]).
16
17

18 Considering a wide urban application scale, macroseismic methods for building vulnerability
19 assessment can be preferred because of their quick application [1]. Furthermore, they can be used
20 together with hazard characterization approaches based on the adopted macroseismic intensity
21 scale (see Section 3.1). The approach is valid for each structural typology. Specific methods can be
22 employed for masonry constructions [62] and other structural typologies (e.g. reinforced
23 concrete[63]).
24
25

26 However, in HBEs, masonry buildings are the more recurring typologies, thus we refer to them in
27 the following. Their seismic vulnerability assessment is performed according to [63] for ordinary
28 buildings and according to [64] for monumental buildings. For both ordinary and monumental
29 buildings, data to be collected should concern the typological building features [33,64–67], e.g.:
30 structural typology, connections among vertical and horizontal elements, roof typologies, eventual
31 interventions, conservation state, position inside the aggregate.
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

All these vulnerability-affecting data can be retrieved by statistic databases from the public administration. Hence, the data collection process can be speeded up by using data from census databases integrated with GIS tools [56,68].

Streets and open spaces characterization consider geometric (layout-related) and vulnerability features depending on the interferences with the HBE elements. Firstly the related analysis has to consider the HBE access paths, paying special attention to rescuers' vehicle passage to ensure the intervention in the damaged city area [23,42]. Physical barriers, bottlenecks (e.g.: staircases, arches) and geometrical aspects (i.e.: buildings height and streets width) are considered to evaluate possible interferences between buildings and streets system [23,69,70]. Analyzing each structural unit can improve the effectiveness in the evaluation of local damage on streets and open spaces facing the buildings [69,71,72].

The street vulnerability can be evaluated according to the V_{link} method, which is one of the quickest ones [72]. Although other existing and validated tools can be adopted, this tool considers the sum of Macroseismic vulnerability of each building facing the street depending on its incidence on the total street length, as shown by Equation 1:

$$V_{link} = \sum V_i i \quad (1)$$

where: V_i is the vulnerability value of each building (structural unit) along the street evaluated using the methods reported in Section 3.2; i is the ratio between the considered building length facing the street and the total length of the street itself. Since V_{link} can range from 0 to 1, street values can be quickly organized in i.e. four classes: low (0 to 0.25), medium-low (0.25 to 0.5), medium-high (0.5 to 0.75), high (0.75 to 1).

3.3 Exposure assessment

As reported in Section 1, the main exposure-affecting factors can be related to the occupants' presences, distinguished by *pre-disaster* [26,42] and *disaster conditions* [13].

The main exposure data concerning *pre-disaster conditions* is the people's presence in the HBE by distinguishing possible different typologies: inhabitants versus tourists. We can assume that the resident population, including workers who are used to frequent the HBE, have familiarity with it and with the emergency dispositions. On the contrary, daily visitors and tourists can be considered unaware. Critical pre-disaster conditions can be defined in terms of the maximum human presence, to consider the maximum impact on direct (e.g. casualties due to buildings damage/collapse [42,73]) and indirect (e.g. evacuation related ones [19]) losses.

The most rapid exposure evaluation could just consider the density of people (pp/km² where *pp* stands for the number of people) according to [74] and census databases referred to the considered HBE (e.g.: national on-line census, local municipalities or tourist office) [26]. In some cases, census databases can be linked to the detailed position of the population (e.g. street survey-based; integrated with GIS tools), by mainly focusing on standard occupancy levels, e.g. residents [26]. However, the number and position of exposed people vary over time and space essentially depending on the variations of factors collected in Table 1.

Table 1 Time and space issue influencing the human presence variation in the HBE.

Human presence typologies and their combinations	Visitors	Inhabitants + neighbouring of the local municipality area	Inhabitants + visitors	Visitors presence in mass gatherings events
People familiarity with places and emergency plans	Scarce familiarity with the urban spaces and with the emergency plans	Satisfying level of familiarity with spaces depending on their (frequent) HBE attendance	Different familiarity levels	Generally scarce familiarity with the urban spaces and with the emergency plans

Time issue	By considering visitors' flows during the year: critical conditions in exposed individuals' presence (e.g. monthly) correspond to the periods with the higher number of tourists' presence (considering both daily visitors and holidaymakers).	By considering inhabitants and neighbours during the week: estimating critical conditions in exposed individuals' presence (e.g. weekly)	By considering inhabitants and visitors during the day: these analyses allow considering the variations during the working time and between night and day (e.g. sleep time, working time, working, and resting time).	Critical conditions characterized by a high crowd density can occur in the urban tissue (e.g. concert venue, festivals).
Space issue	Visitors can be mainly placed in accommodations (e.g. hotels, tourist homes, such as for night-time periods) depending on their effective capacity, or even according to a homogenous dispersion (including public buildings, as for day-time periods).	Local markets, recurring fairs or festivities hosted by the HBE bring in town habitual visitors from near towns or peripheral areas that populating open spaces.	For some municipalities (e.g.: tourist cities/areas), further evaluations should consider the daily presence of individuals spending their time in some urban attraction.	Specific risk-increasing HBE features (e.g. in historical scenarios, the crowd in narrow spaces) have to be considered. Such an event in the HBE can be overlaid to the critical conditions for resident people obtaining overcrowding conditions among narrow urban environments.
References	[75]	[16]	[26]	[16]

The capacity [pp] estimation and the related people positioning in the HBE layout can be jointly assessed through census databases and municipal tourism promotion companies, regional tourism management bodies, trade organizations³. The capacity estimation can take advantages of standard data from occupant load [pp/m²] assessment as follow (the methodology and specific references for the Italian case-study are shown in Table 2):

1. identification of buildings open to the public, and their use, especially if they can be affected by potential high occupants' density/overcrowding conditions. Occupants' capacity of such public buildings [pp] is rapidly determined: the occupant load factors ([pp/m²] or [m²/pp]) provided by the code of practice for Fire Safety Design is applied to the building area

³ E.g.: for Italy, the National Institute of Statistic http://dati.istat.it/Index.aspx?DataSetCode=DCIS_POPRES1, for USA, United States Census Bureau <https://www.census.gov/data.html> (last access 06/07/2020)

extension depending on the hosted functions (see Table 2). Specific national sources can be used to this end⁴;

2. *evaluation of the capacity of residential buildings by determining the number of inhabitants*

[pp]. General Land Office⁵ surveys can provide a detailed map of residents, by additionally reporting additional data (e.g. age, gender) for each housing unit identified by the own civic number. Moreover, data about disabled people can be collected according to the Privacy Act by local healthcare agencies or civil protection bodies (that have to intervene in case of emergency to rescue them) [76]. Inhabitants' presence in their house has to be considered in relation to the time-dependent assumptions in Table 1 and the building use in Table 2 [26];

3. *evaluation of occupant capacity of public spaces [pp] susceptible to overcrowding*

phenomena in case of temporary mass gatherings. According to a conservative approach, the maximum crowding-related occupant load range⁶ of assembly areas could be reasonably considered from 2 to 4 pp/m². In case of local markets, the occupant load can be considered equal to commercial buildings data (compare to Table 2). The occupant capacity can be precautionarily esteemed in reference to gross (including parking, events stages, stands, and other urban furniture) or net area of the public spaces. In a general hypothetical situation, occupants leave their buildings and occupy public spaces by overlapping to mass gathering events, thus constituting a multi-hazard scenario due to the merging of occupants' presence conditions. Thus, it can be esteemed through the evaluation of the crowding density [pp/m²] of overall public spaces. This data can be also expressed in terms of capacity [pp], so as to

⁴ E.g.: in England <https://bit.ly/2JcT6Vi>, in the United States <https://bit.ly/2UweLwX>, and in Canada <https://bit.ly/3dmj6v8> last access 06/07/2020.

⁵ (.g. <http://www.protezionecivile.gov.it/resources/cms/documents/Manuale.pdf>, last access 06/07/2020

⁶ e.g. from Italian regulations such as DM 19/08/1996; Circolare ministeriale (Ministero dell'interno) 18-07-2018, n. 11001/1/110/(10)

outline the effective maximum exposure scenario for simulation-based methodologies

[13,26,42].

Table 2 Evaluation of the crowding density in buildings opens to the public in relation to the Italian fire safety codes due to their connection with the case-study application. In case of historical buildings hosting the intended use, regulations could be integrated, from a general point of view, according to the rules provided by Ministerial Decree (DM): DM 3/8/2015, DM 8/6/2016, DM 9/8/2016, Circular letter n° 3181 del 15/3/2016

Intended use	Methodology	Quick occupant load factor	References to Italian regulations
Residential buildings	The crowding density for private dwellings is related to their surface	0.05 pp/m ² (imposed by regulations)	For residential buildings: DM 3/8/2015
Institutional buildings including architectural and historic ones used as offices, museum, and art gallery	Infield survey to trace information about the number of the occupant (personnel) with a precautional increase of 25% rounded to the upper bound-. The number of possible visitors has to be added by considering the area extension of public office In the absence of further information, use the quick occupant load factor.	Office close to public: 0.1 pp/m ² Office open to public: 0.4 pp/m ² Areas gathering public: 0.7 pp/m ²	Generally, assimilable to the crowding of working place: DM 10/3/1998, DM 3/8/2015; for other public exhibition places, i.e. hosted by historical buildings: DM 20/5/1992, DPR 30/6/1995; for areas hosting cultural events with the public: DM 19/8/1996, DM 6/3/2001, DM 3/8/2015;
Religious buildings	For each building, the number of seats has to be counted adding the number of standing places	0.7 pp/m ² applied to the available area extension	For this intended use, assimilable to entertainment and public exhibition places: DM 19/08/1996, DM 6/3/2001, DM 18/12/2012;
Hospital and healthcare buildings	Infield survey to trace the information regarding the number of available beds. The number of in-service personnel is added and the variation due to visitors esteemed through the average data of at least three typical days	Ambulatory and similar: 0.1 pp/m ² Spaces for visitors: 0.4 pp/m ²	For this intended use, assimilable to the crowding for working places: DM 10/3/1998
School buildings	The number of seats for each classroom and eventual annexes (e.g.: refectory, gym) has to be collected in relation to the number of students, teachers, and personnel, according to the headteacher declaration	Refectory and gymnasium: 0.4 pp/m ² A maximum of 26 individuals can be considered for each classroom	DM 26/8/1992, DM 12/5/2016, DM 3/8/2015
Cultural and entertainment buildings (public exhibition and sports facilities)	Evaluation of the main activities and the presence of seats for the public (number of seats)	In a precautional way: ballroom - 0.7 or 1.2 pp/m ² ; theaters parterre -3 pp/m ² , standing places - 3.5 pp/m ² Sports facilities: 2 pp/m ²	DM 18/3/1996, DM 6/6/2005, DM 19/8/1996, DM 18/12/2012
Commercial buildings	The crowding index is related to the surface of the overall floor	0.4 pp/m ²	DM 27/7/2010, DM 3/8/2015
Accommodation facilities	Data about a general scale could be provided by tourism organizations subdivided for periods or	0.4 pp/m ² (i.e. common spaces)	DM 27/7/2010, DM 3/8/2015

	seasons (e.g.: the municipal tourism promotion companies, regional tourism management bodies, trade organizations). Infield surveys are necessary to obtain the single structures maximum capacity, the number of beds and personnel (increased by 20%)		
Public shops such as restaurants bars and cafes	The crowding values can be reasonable esteemed in relation to the extension of the area, for bars and cafes infield surveys are desirable to esteem the number of costumers during each time slot	0.7 pp/m ² (precautionary evaluations)	For this intended use, assimilable to public exhibition places: DM 19/8/1996, DM 6/3/2001, DM 18/12/2012; from a general point of view: DM 3/8/2015

Disaster conditions concerning **exposure-related** factors regard the individuation of areas where the population can gather and wait for the rescuers' arrival [23,69,77]. Such assembly areas should:

- *be reached and usable by pedestrians.* The free entrance to the area (e.g. no access gates closure) over time, as well as the absence of obstacles related to particular space uses (e.g. spaces used to host fairs and exhibitions; parking **areas**) **should** be always guaranteed;
- *host the evacuees in adequate crowding conditions,* by avoiding the possibility **of** physical contact among evacuees (i.e., maximum Level of Service D according to [78]). In this sense, related occupant load values can essentially range from about 2 pp/m² to about 3.5 pp/m² [79]. The **individuated assembly areas A_a [m²]** **should be estimated** by excluding some **parts, i.e.:** (1) potentially affected by buildings debris; (2) small prefabricated structures (including temporary ones) and fixed urban furniture; (3) parking lots (precautionarily considered as occupied); (4) carriageway reserved to emergency vehicles access (3.5 m, considering the width of the heavy rescue vehicle).

3.4 **Street** and open spaces damage assessment

Street and open spaces should guarantee the mobility of evacuees and rescuers in the immediate aftermath. In general terms, the **street** availability assessment can be performed according to two levels of details [20,69,80–82]: (a) **possibility that the street can be blocked by the debris**; (b) evaluation of the debris quantities along the **street**, to estimate the available free-of-debris **street**

width. Quick methodologies and experimentally validated ones are preferred to this end in this work.

The approach of [72] defines a street as blocked by debris if there is at least one building along the street for which, contemporarily: A) the ratio between the building height and the street width is equal or higher than 1 (potential façade overturning); B) the suffered damage by the aforementioned building reach the 4th grade of the EMS98 scale (heavy structural damages or collapse [57]) according to the Macroseismic approach [63]. Otherwise, the street can be available.

The external (i.e. along the streets) debris percentage Qx [%] is defined as the ratio between the external debris area and the street area facing the building. This value can be rapidly estimated according to [32]. This work provides experimental-based relations as function of the building vulnerability (calculated according to [63]), the earthquake moment magnitude and the ratio between the building height and the street width. Then, Qx is combined to the mean street width W_b [m] facing the considered building to evaluate the effective debris depth on the street d_{debris} [m], according to Equation 2:

$$d_{debris} = Qx * W_b \quad (2)$$

Then the available width of the street can be easily evaluated by subtracting d_{debris} (for each facing building) to W_b .

3.5 Case-study application

The proposed framework is applied to the historical city centre of Offida (Lat. 42.93, Long. 13.70), Italy, which is representative of Italian historical settlements highly affected by earthquake risk because of these main three aspects:

1. *typological and settlement issues*: the urban tissue follows a medieval compact layout characterized by building aggregates (masonry buildings with irregular shape and age

1 construction) merged into a narrow streets network system. Moreover, the Historic Centre
2 is confined within the ancient defensive walls system that makes difficult the
3 interconnection with the outside areas in case of emergency;
4
5

- 6
7
8 2. *seismic hazard*: Offida is involved in the frequent seismic activity of its region due to the
9 geomorphological configuration of the Central Apennine mountains. Moreover, relevant
10 earthquakes have been occurred over the time because of the presence of a well-known
11 seismogenic source⁷ in the adjacent territories.
12
13
14
15

- 16
17
18 3. *exposure*: many tourist attractions are hosted by the HBE from the cultural and architectural
19 points of view and several numbers of mass gathering events are organized during the year
20 bringing in town a considerable number of tourists.
21
22
23
24
25

26 The HBE application area is marked in Figure 2.B: it corresponds to the more complex historic part
27 of the whole historic centre in terms of buildings vulnerability, street/open spaces layout, and
28 crowding conditions.
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

61
62 ⁷ <http://diss.rm.ingv.it/dissGM/>; <https://goo.gl/3Tbrbd>; last access: 06/07/2020
63
64
65

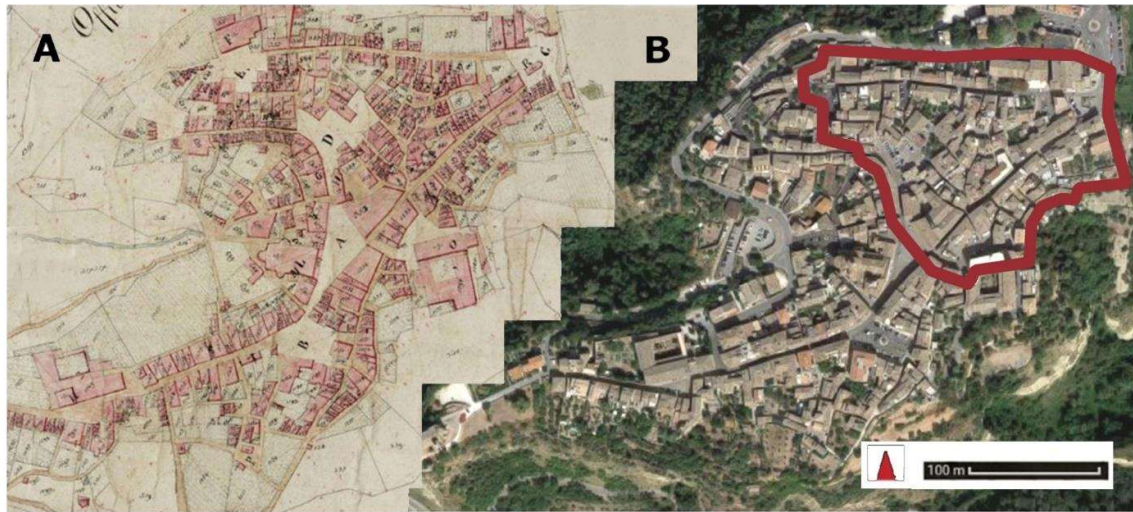


Figure 2 The part of the historic centre (red-marked) of Offida taken as case study. The figure compares: A) the historic map (Gregorian Cadastral maps of 1835 available at <http://www.cflr.beniculturali.it/Gregoriano/mappe.php>); B) the current settlement (source: Google Maps). Last access to websites 06/07/2020.

4 Results

4.1 Seismic hazard: earthquake characterization

Seismic Hazard characterization concerning the case-study application provides the following data according to Section 3.1 methodologies. Macroseismic data from the INGV database⁸ are organized to provide statistics of historic seismic events. Figure 3 graphically traces the related results. Two main events are considered in the following (intensity values are expressed as next whole number): MCS=IV, that is the mean value, as for the 2003 earthquake, corresponding to Mw=4.0; MCS=VIII, that is the maximum value, as for the 1943 earthquake, corresponding to Mw=6.0.

⁸ https://emidius.mi.ingv.it/CPTI15-DBMI15/query_place/ last access 06/07/2020

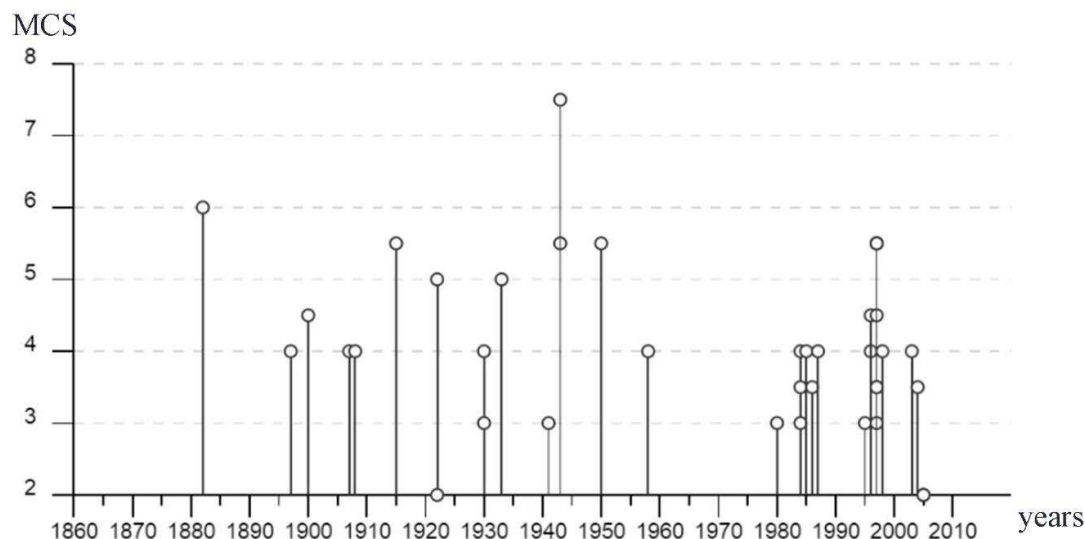


Figure 3 Historic seismicity of *Offida* according to the INGV database from 1860 to 2017 (https://emidius.mi.ingv.it/CPTI15-DBMI15/query_place/; last access: 06/07/2020). The *stronger event* (between VII and VIII MCS scale) refers to the 1943 earthquake with *the epicentre* in the municipality of *Offida*.

4.2 Vulnerability and layout

The evaluation of the historical evolution of the urban *tissue* is implemented thanks to the availability of historic maps (see Section 3.2). According to Figure 2, the current urban *tissue* structure is comparable to the one of *the* 1835. Figure 4 traces the building and *street* vulnerability within the selected area of the HBE. The vulnerability of monumental and ordinary buildings is shown in Figure 2-A (for the statistical distribution of ordinary buildings, see Figure 4-B). *Street and open spaces* analyses are provided in Figure 4-C and concern the identification of both the access points for rescuers' vehicles and the pre-defined Assembly Areas (AS) for the selected area (according to the Municipality Emergency Plan). Moreover, the same figure outlines the *street vulnerability*, by overlaying it to the *buildings* vulnerability data.

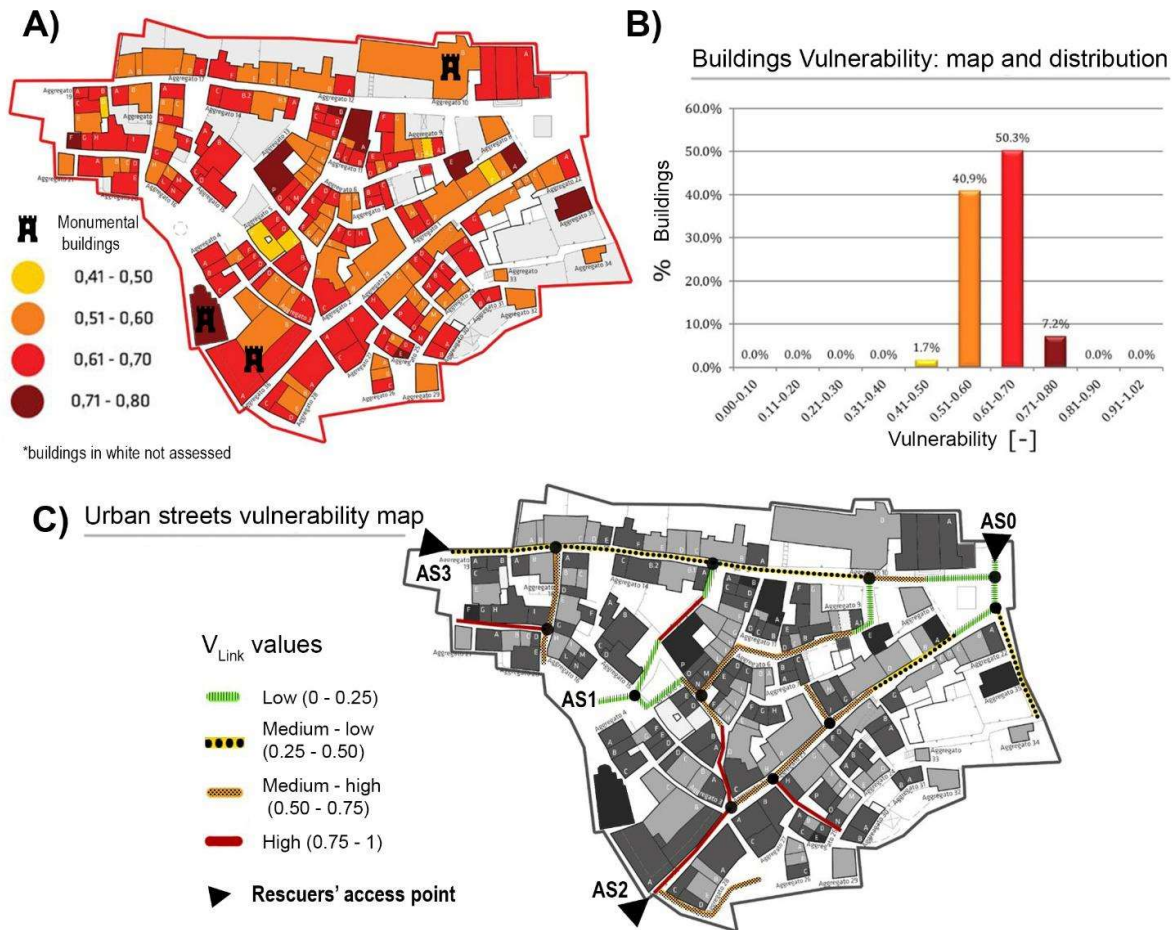


Figure 4 Buildings vulnerability (based on [63,64]) for the selected part of the Historic Centre of Offida: A) vulnerability map by pointing out the monumental buildings and the not evaluated structural units (in white; they do not face on the main evacuation street); B) statistic distribution of ordinary buildings vulnerability; C) vulnerability map of the main streets, where black dots highlight the nodes among streets (nodes referring to dead-end streets or assembly areas are not marked). Four assembly areas (defined by the emergency plan and identified by the code AS and a number 0 to 3) and three rescuers vehicles' access points are reported for emergency planning issues.

4.3 Exposure assessment

To establish the maximum daily presences [pp] in pre-disaster conditions according to Section 3.3 methodology, the visitors flow during the year is firstly assessed by using monthly data from the

Regional Observatory of the Tourism⁹, as shown by Figure 5-A. Daily visitors' presences are directly retrieved according to databases from museums and tourist attractions¹⁰, as shown by Figure 5.B. These surveys allow considering the daily presence of visitors. Results of Figure 5 highlight how a sensible increase in population occurs during the summer (i.e. in August, due to the holiday season in Italy).

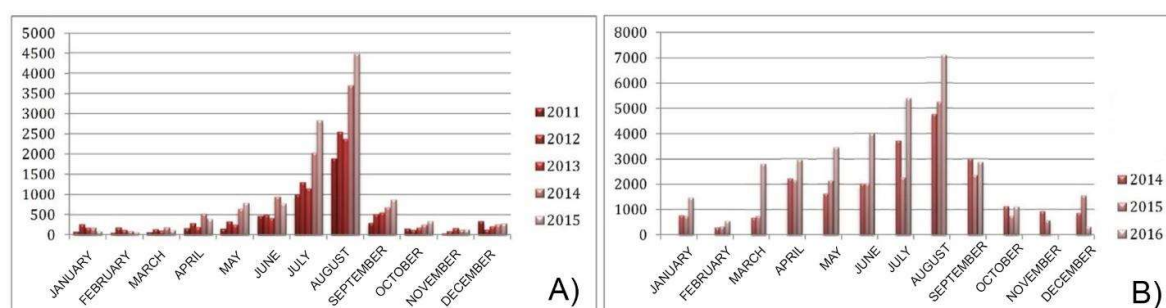


Figure 5 Monthly presences related to: A) visitors (tourist flows; years 2011-2015) of the whole historic centre (source: <http://statistica.turismo.marche.it/DatiTurismo>; last access:06/07/2020); B) daily visitors (years 2014-2016) to museums and tourist attractions (source: <http://www.fabbricacultura.com/socio/oikos>; last access 06/07/2020).

Then, Figure 6 resumes the number of inhabitants of the Historic Centre. It is obtained from the municipal database in association to: a) each residential unit, that is, by including information related to the citizens' age, subdividing them into different age-related ranges [83] (i.e.: 0-14 years, parent-assisted children; 15-19 years, autonomous young people; 20-65 years, adults; >65 years, elderlies including those with potentially reduced motion abilities); b) the resulting value for each building aggregate, in terms of the total number of inhabitants. A total of 750 inhabitants can be considered for the overall HBE and 319 only within the case-study area (black line in Figure 6).

⁹ <http://statistica.turismo.marche.it/DatiTurismo>, last access:06/07/2020

¹⁰ <http://www.fabbricacultura.com/socio/oikos>, last access: 06/11/20

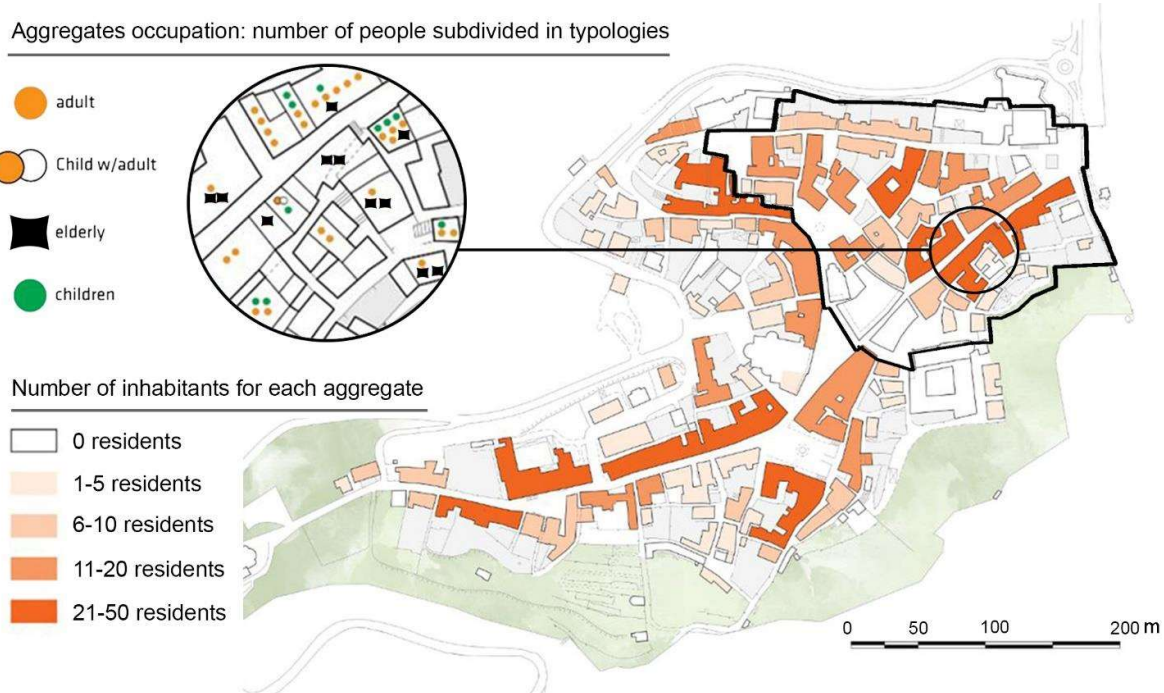


Figure 6 Characterization of inhabitants for the historic city centre by outlining the number of inhabitants for each aggregate (the black line evidences the case-study area). The detailed planimetry excerpt (inside the circle) focuses on aggregates occupation in terms of the number of people by distinguishing them in four typologies according to [27]: parent-assisted child, young people, adult, and elderly.

The assessment of the public building occupant capacity is performed by considering the indications summarized in Table 2, according to a quick evaluation of the occupant load [pp/m²] and to the related building intended use (compare to Section 3.3). The results are graphically shown in Figure 7. These data are merged with those of outdoor public spaces occupant load to define the crowding density (pp/m²) in open spaces and streets, as shown by Figure 8. In this way, the main areas that are susceptible to mass gatherings (multi-hazard condition) are those of the main street named “Corso Serpente Aureo” (i.e. due to the local market on Thursday) and of the square named “Piazza del Popolo” (i.e. hosting additional festivals).

Occupant capacity: residential, public building and open spaces


Residential

Restaurant

Religious building

Entertainment

Architectural heritage



Occupant capacity: overall planimetry of Offida

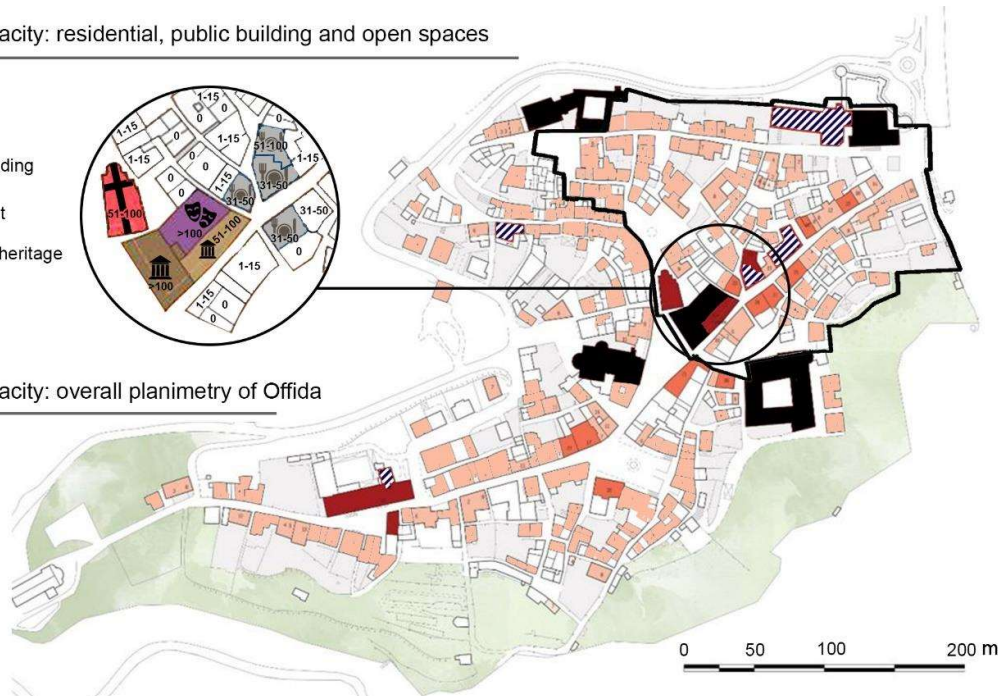



Figure 7 Overall planimetry of Offida with the individuation of the total occupant capacity of buildings, expressed in terms of the number of hosted people (the black line evidences the case-study area). The upper circle shows an excerpt from the analysis in terms of building typologies.

The overlapping of previous data allows defining critical scenarios in terms of occupants' presence in the case-study area. Concerning the selected area marked in Figure 2.B (black perimeter line), the scenarios described in Table 3 can be assumed as representative of recurring maximum achievable crowding conditions all over the year.

Occupant capacity: Open spaces





Figure 8 Planimetry of the case-study area in Offida with the evaluation of the crowding density (pp/m²) in public spaces, by evidencing the selected area border. The areas that can host mass gathering events are also evidenced by the hatching texture.

Table 3 Case-study maximum crowding scenarios

	Thursday (9-12 a.m.)	[pp]	Saturday (8-11 p.m.)	[pp]
Building intended use:				
Building heritage (museums, churches)	considering offices in the municipal buildings	121	considered as closed	-
Hospital and healthcare buildings	both personnel and patients	110	long term care	40
Cultural buildings (i.e. theatres)	cultural activities normally held during evenings and weekends	-	cultural activities held imply maximum crowding conditions	300
Commercial buildings	holding maximum occupant loads	176	are closed	-
Tourists accommodation	closed due to day-time activities	-	empty due to evening-time activities	-
Restaurants	are closed because of out of the lunchtime	-	maximum crowding conditions	189
Bars and café	holding maximum occupant loads	47	maximum crowding conditions	47
Inhabitants	people between 20 and 65 years old are supposed out of the Historic Centre, at work	143	dwellings are occupied by residents at the dining time	319
Open spaces:				
Pedestrians	crowding conditions in open spaces of the HBE hosting the weekly market along the main street "Corso Serpente Aureo" considering 0.4 pp/m ²	560	HBE could host additional events (e.g. other local markets), assuming an occupant load equal to 0.4 pp/m ²	560
Total:		1157		1455

Additionally, the "Saturday evening" scenario could be characterized by the possibility of mass gatherings within the open public spaces in the HBE. In particular, the central urban square "Piazza

del Popolo” (Figure 8) that is able to host a maximum level of crowding equal to 3200 people on a limited gross area of 1600 m² (by considering a density of 2 pp/m², according to Section 3.3). In such conditions, the local theatre could be considered reasonably empty. Finally, in both the scenarios, the tourists’ presence (during the summer, according to Figure 5) can be added to the overall capacity of the considered area by summing up 150 individuals, which represents the average value of daily presences (calculated by dividing the maximum monthly tourists' presences for 30 days).

According to the municipal emergency plan, four assembly areas (AS0, AS1, AS2 and AS3) are positioned to host evacuees to face the disaster conditions (their position is reported in Figure 4). However, for each of them, the available area A_a [m²] can be evaluated only by estimating the area occupied by ruins (see next Section 4.4).

4.4 Streets and open space damage assessment

The streets availability in the first phases of the evacuation is based on the debris depth estimation approach as described in Section 3.4. The estimation is provided for both the considered earthquake magnitude values M_w equal to 4.0 and 6.0 (see Section 4.1). d_{debris} [m] values are discretized in homogeneous classes with an approximation of 0.5 m to be reasonably comparable to the individual’s width. The results are shown in Figure 9.

Debris prediction map (debris depth)

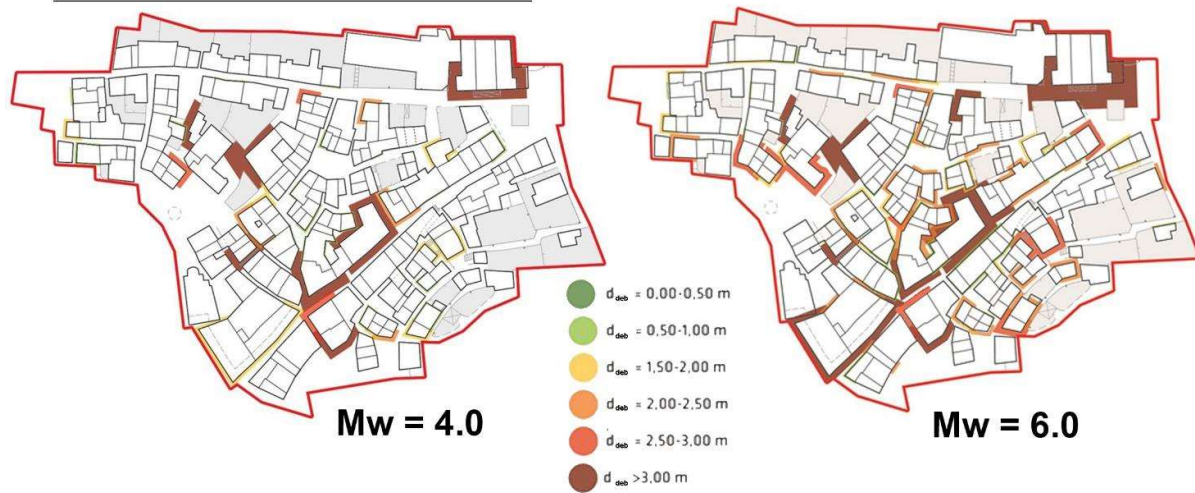


Figure 9 Debris prediction map on the paths network for Mw=4.0 and Mw=6.0.

This approach quickly allows evaluating the probable free-of-debris street width. Figure 10 outlines the maps for the two earthquake scenarios in terms of magnitude to propose a rescuers' access scheme and the distribution of people towards the related assembly areas (compare to "assembly area influence"). These planning elements can be easily proposed depending on the probable streets blocked by debris, and the eventual presence of potential isolated areas during the evacuation process and the immediate aftermath. In both the considered earthquake scenarios, the central area of the settlement is characterized by narrow streets with vulnerable facing buildings thus leading to unavailable streets. Hence, suitable risk mitigation interventions through the reduction of building vulnerability should be planned in this area, also according to the basic vulnerability-related results shown in Figure 4.

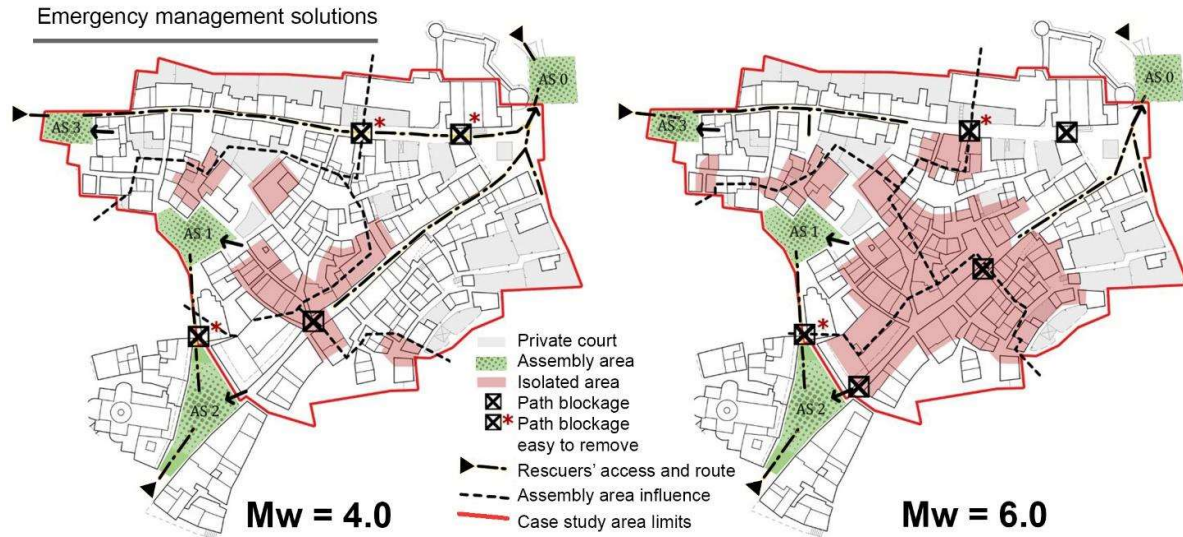


Figure 10 Streets and open spaces damage assessment for Mw=4.0 and Mw=6.0: criticalities and main solutions for emergency management focused on the rescuers' vehicle access and the assembly areas. The unavailable streets marked by "*" refer to possible occlusions for the vehicle's transit that could be rapidly reopened in the first emergency phases.

The debris depth estimation is also performed to evaluate the available area A_a [m²] of each assembly areas according to Section 4.3 depending on the earthquake magnitude. Table 4 shows A_a values excluding the area occupied by possible debris.

Table 4 Extension of assembly areas (rounded at 10m²) in pre-disaster conditions and as a function of the earthquake magnitude. the pre-disaster area of the assembly area 2 is considered equal to 1/3 of the total square area ("Piazza del Popolo") to conservatively consider the possible affluence of people coming from surrounding areas.

Mw	A_a [m ²]			
	0	1	2	3
- (pre-disaster)	1020	950	580	540
4.0	990	890	520	500
6.0	920	830	470	470

5 Discussion

The Offida case-study shows how the novel proposed framework allows creating risk scenarios by quickly and effectively detecting the significant HBE risk-affecting factors, i.e. those typical of historical city centres contexts.

Specifically, Offida embodies the typical Italian Historic Centre located in a frequent earthquake-prone region, **due to** its narrow streets network and highly vulnerable buildings which developed over time according to the HBE evolution. About exposure-related factors, the settlement is strongly affected by a sensible variation in the number of the hosted population (**inhabitants** and visitors), **during both the week and the** different periods of the year (i.e. because of the tourists' flow). The most critical conditions of overcrowding (**that constitute a multi-hazard condition**) are recorded during the summer, on Thursday morning (due to the presence of the local market) **and Saturday** evening (due to the **crowd in** pubs, restaurants, and the city theatre). The two damage scenarios **for the considered earthquake events (Mw=4, Mw=6)** describe high earthquake-affected modifications to the urban environment (e.g.: debris effects due to buildings collapse, **also along the streets**) which would cause significant impediments to the rescue system if they were not **preventively** taken into account in the emergency **plans**. Although differences in earthquake effects on the built environment exist because of the earthquake severity, the method application results evidence that (see Figure 10):

- the area of the main street "Corso Serpente Aureo" must be the "hot-spot" in the urban **tissue** for seismic retrofit interventions on buildings, to reduce the total amount of debris along the street and limit the **streets unavailability considering the evacuees**;
- the assembly areas AS are generally accessible by rescuers (from the outside of the considered area perimeter), except for the AS1, in both the earthquake intensities scenarios (an immediate intervention is required to remove **the debris** along the AS2 to AS1 access path);
- the AS0 is marginally affected by buildings collapse mainly because of its wide dimension, and so it can be used as **the main** AS to host evacuees coming from the highly-dense populated areas of the main street "Corso Serpente Aureo";

- these risk-reduction interventions effectiveness could be increased only if the **evacuees** are aware of the urban context, e.g. they should be properly guided towards **the** best evacuation paths and AS during the emergency evacuation.

Therefore, the case-study application demonstrates how the proposed **framework** is: *holistic*, since it handles input data on seismic hazard, HBE vulnerability, exposure, and emergency response; *structured*, because it combines data to define emergency **scenarios to** move towards advanced **methodologies (such as those based on simulation-based approaches); quick-to-apply and sustainable**, since it is mainly based on existing and quick-to-access databases, by integrating local data with rapid on-site survey methodologies; *reliable*, due to its *experimental-based* approach; and finally *oriented towards a human-centred perspective*.

The proposed framework introduces some significant novelties in view of risk assessment and emergency management actions in HBEs.

Contrarily to other studies on the same topic, this work takes into account and widely debates the exposure issue introducing several users' typologies hosted by the HBE at different times and for different purposes. For instance, the determination of exposure parameters is based on a single source on census data (number of inhabitants) (e.g. [48]). In human-centred studies based on emergency simulation (e.g. [13]), the input scenarios are randomly populated by the individuals. On the contrary, in this work, inhabitants are counted considering punctual residential information by also inquiring their ages. Furthermore, the crowd density of HBE outdoor spaces and buildings are considered to determine the presence of tourists and daily visitors. Buildings with specific intended uses (e.g.: hotels, hospitals, theatres, restaurants) are considered to this end. In this way, the framework easily allows to overlap different effects of ordinary conditions and mass gathering events (also including the open spaces in the HBE), thus investigating critical scenarios from a multi-

hazard point of view. All these kinds of data will be considered to create more detailed scenarios on hosted populations in simulation-based risk assessment.

Concerning vulnerability-related aspects, the previous studies declare the necessity to conduct in-situ surveys on materials quality and constructive techniques by trained personnel (e.g. [40]). On the contrary, here the involvement of reliable easy-to-use methods pursues the rapid applicability by non-expert technicians as well.

Finally, the proposed framework adopts punctual existing methods in literature to determine single risk components within its practical implementation. Such methods are not exclusive, but they could be replaced by other ones giving the same inquired parameters (also in the view of future methodological improvements). This adaptability criterion enriches the framework innovation, contrarily to other existing methods that seem to establish the adoption of a unique model to collect and manage data (e.g. [37,39]).

6 Conclusion

The improvement of urban resilience against seismic disasters should be aimed at risk reduction strategies based on an effective knowledge of the scenario's conditions. Historical Built Environments and their users are strongly affected by such disasters, because of the high vulnerability of the first and the high exposure due to the second ones (over time and space). Thus, defining risk scenarios is a priority item to determine critical conditions of such contexts and then provide risk-reduction strategies, including pre-disaster interventions and emergency response. This paper firstly provides a novel framework to collect and manage seismic risk-affecting factors and organize risk scenarios, by using current and validated tools. The significant case-study application demonstrates the framework capabilities, thus evidencing that the proposed approach constitutes the first step for a sustainable emergency planning process based on an overall perspective of the

1 most problematic HBE elements in case of a certain seismic event. In particular, results show that
2 easily available data and accessible sources can create a reliable input scenario for HBE risk
3 assessment and emergency management analyses, thus avoiding costly in situ surveys (e.g.:
4 interviews, practical verifications) and guaranteeing a rapid implementation process. Thanking to
5 the easy-to-use employed tools, the entire framework can be implemented by non-expert
6 technicians, too. The inhabitants' distribution is punctually investigated providing more detailed
7 scenarios on hosted populations. Moreover, the framework provides the possibility to also
8 determine exposure "peak" conditions in the scenarios, including the effects of mass gatherings into
9 the HBE from a multi-hazard point of view. In this sense, future integration with GIS-based
10 procedures will boost the application process.
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

26 From a holistic point of view, this work contributes to evidence the connections between
27 vulnerability-related issues (including heritage preservation) and the safety of individuals hosted in
28 the HBEs. The main issues concerning the data collection are gathered in a unique methodological
29 framework, thus constituting the first step towards emergency analysis (i.e. simulation-based)
30 approaches. Hence, this novel proposed framework can be employed with other disaster typologies
31 (e.g. further multi-hazard conditions and climate change-related disasters). To do this, some
32 adjustments will be required on the definitions of risk-related factors connected to different disaster
33 sources to face off. Future works for numerical and objective quantifications of the risk in urban
34 areas could take advantage of this provided organization for dataset creation. From this point of
35 view, urban planners and Civil Protection Bodies can base their risk reduction solutions connected
36 to management actions and physical interventions on the HBE elements. Future efforts will start to
37 jointly combine the results of this work with evacuation simulation outcomes, to deeply
38 comprehend the effects of human behaviours in the HBE in an emergency scenario. In particular,
39 the investigations on users' typologies traced in this framework will provide exhaustive data for
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

populating the HBE at a different time, by also including possible inhomogeneous features related to exposed individuals' motion disabilities and familiarity with evacuation procedures.

Acknowledgments

The authors would like to thank Eng. Alighiero Lucidi for the support in the case-study application activities.

7 Bibliography

- [1] E. Quagliarini, M. Lucesoli, G. Bernardini, Rapid tools for assessing building heritage's seismic vulnerability: a preliminary reliability analysis, *Journal of Cultural Heritage*. 39 (2019) 130–139. doi:10.1016/j.culher.2019.03.008.
- [2] C. Santos, T.M. Ferreira, R. Vicente, J. a R. Mendes da Silva, Building typologies identification to support risk mitigation at the urban scale - Case study of the old city centre of Seixal, Portugal, *Journal of Cultural Heritage*. 14 (2013) 449–463. doi:10.1016/j.culher.2012.11.001.
- [3] E. Pilone, P. Mussini, M. Demichela, G. Camuncoi, Municipal Emergency Plans in Italy: Requirements and drawbacks, *Safety Science*. 85 (2016) 163–170. doi:10.1016/j.ssci.2015.12.029.
- [4] B. Pizzo, Problematizing resilience: Implications for planning theory and practice, *Cities*. 43 (2015) 133–140. doi:10.1016/j.cities.2014.11.015.
- [5] B. Wang, B.P.Y. Loo, F. Zhen, G. Xi, Urban resilience from the lens of social media data: Responses to urban flooding in Nanjing, China, *Cities*. 106 (2020) 102884. doi:10.1016/j.cities.2020.102884.
- [6] G. Bernardini, M. Postacchini, E. Quagliarini, M. D'Orazio, M. Brocchini, Flooding

1 Pedestrians' Evacuation in Historical Urban Scenario: A Tool for Risk Assessment Including
2 Human Behaviors, in: R. Aguilar, D. Torrealva, S. Moreira, M.A. Pando, L.F. Ramos (Eds.),
3 Structural Analysis of Historical Constructions - RILEM Bookseries, 1st ed., Springer, Cham,
4 Cham, 2019: pp. 1152–1161. doi:10.1007/978-3-319-99441-3_124.
5
6
7
8
9

10 [7] L. Lombardo, H. Tanyas, I.C. Nicu, Spatial modeling of multi-hazard threat to cultural heritage
11 sites, Engineering Geology. 277 (2020) 105776. doi:10.1016/j.enggeo.2020.105776.
12
13
14

15 [8] C. Modena, Recent advances of Italian recommendations and standards on structural safety of
16 existing masonry structures, in: Brick and Block Masonry-From Historical to Sustainable
17 Masonry: Proceedings of the 17th International Brick/Block Masonry Conference
18 (17thIB2MaC 2020), July 5-8, 2020, Kraków, Poland, 2020: p. 42.
19
20
21
22
23
24
25

26 [9] A. Borri, M. Corradi, Architectural Heritage: A Discussion on Conservation and Safety,
27 Heritage. 2 (2019) 631–647. doi:10.3390/heritage2010041.
28
29
30
31

32 [10] M. Hadzima-Nyarko, V. Mišetić, D. Morić, Seismic vulnerability assessment of an old
33 historical masonry building in Osijek, Croatia, using Damage Index, Journal of Cultural
34 Heritage. 28 (2017) 140–150. doi:10.1016/j.culher.2017.05.012.
35
36
37
38
39

40 [11] J.M. Ilic, R. Bento, S. Cattari, 3DGIS representation for supporting seismic mitigation policies
41 at urban scale: The case study of Lisbon, Journal of Cultural Heritage. (2020) 1–14.
42
43
44
45
46
47

48 [12] K. Kojima, K. Fujita, I. Takewaki, Building earthquake resilience in sustainable cities in terms
49 of input energy, Sustainable Cities and Society. 12 (2014) 46–62.
50
51
52
53
54
55

56 [13] A. Zlateski, M. Lucesoli, G. Bernardini, T.M. Ferreira, Integrating human behaviour and
57 building vulnerability for the assessment and mitigation of seismic risk in historic centres:
58 Proposal of a holistic human-centred simulation-based approach, International Journal of
59
60
61
62
63
64
65

Disaster Risk Reduction. 43 (2020) 101392. doi:10.1016/j.ijdr.2019.101392.

- [14] S.R. Shrestha, R. Sliuzas, M. Kuffer, Open spaces and risk perception in post-earthquake Kathmandu city, *Applied Geography*. 93 (2018) 81–91. doi:10.1016/J.APGEOG.2018.02.016.
- [15] M. Hajibabae, K. Amini-Hosseini, M.R. Ghayamghamian, Earthquake risk assessment in urban fabrics based on physical, socioeconomic and response capacity parameters (a case study: Tehran city), *Natural Hazards*. 74 (2014) 2229–2250. doi:10.1007/s11069-014-1300-7.
- [16] M. Haghani, M. Sarvi, Crowd behaviour and motion: Empirical methods, *Transportation Research Part B: Methodological*. 107 (2018) 253–294. doi:10.1016/J.TRB.2017.06.017.
- [17] A. Sharifi, Resilient urban forms: A macro-scale analysis, *Cities*. 85 (2019) 1–14. doi:10.1016/j.cities.2018.11.023.
- [18] S. Lagomarsino, S. Podestà, *Analisi di vulnerabilità e rischio sismico degli edifici monumentali*, (2002).
- [19] M.B. Rojo, E. Beck, C. Lutoff, The street as an area of human exposure in an earthquake aftermath: the case of Lorca, Spain, 2011, *Natural Hazards and Earth System Sciences*. 17 (2017) 581–594. doi:10.5194/nhess-17-581-2017.
- [20] E. Quagliarini, G. Bernardini, S. Santarelli, M. Lucesoli, Evacuation paths in historic city centres: A holistic methodology for assessing their seismic risk, *International Journal of Disaster Risk Reduction*. 31 (2018) 698–710. doi:10.1016/j.ijdr.2018.07.010.
- [21] E.L. French, S.J. Birchall, K. Landman, R.D. Brown, Designing public open space to support seismic resilience: A systematic review, *International Journal of Disaster Risk Reduction*. 34 (2019) 1–10. doi:10.1016/j.ijdr.2018.11.001.
- [22] M. Francini, S. Gaudio, A. Palermo, M.F. Viapiana, A performance-based approach for innovative emergency planning, *Sustainable Cities and Society*. 53 (2020) 101906.

doi:10.1016/j.scs.2019.101906.

- [23] Italian technical commission for seismic micro-zoning, Handbook of analysis of emergency conditions in urban scenarios (Manuale per l'analisi della condizione limite dell'emergenza dell'insediamento urbano (CLE); in Italian), 1st ed., Rome, Italy, 2014.
- [24] A. Sharifi, Urban form resilience: A meso-scale analysis, *Cities*. 93 (2019) 238–252. doi:10.1016/j.cities.2019.05.010.
- [25] J. Li, J. Li, Y. Yuan, G. Li, Spatiotemporal distribution characteristics and mechanism analysis of urban population density: A case of Xi'an, Shaanxi, China, *Cities*. 86 (2019) 62–70. doi:10.1016/j.cities.2018.12.008.
- [26] R. Hassanzadeh, Earthquake population loss estimation using spatial modelling and survey data: The Bam earthquake, 2003, Iran, *Soil Dynamics and Earthquake Engineering*. 116 (2019) 421–435. doi:10.1016/j.soildyn.2018.09.023.
- [27] M. D'Orazio, E. Quagliarini, G. Bernardini, L. Spalazzi, EPES – Earthquake pedestrians' evacuation simulator: A tool for predicting earthquake pedestrians' evacuation in urban outdoor scenarios, *International Journal of Disaster Risk Reduction*. 10 (2014) 153–177. doi:10.1016/j.ijdr.2014.08.002.
- [28] G.F. Panza, C. La Mura, A. Peresan, F. Romanelli, F. Vaccari, Chapter Three – Seismic Hazard Scenarios as Preventive Tools for a Disaster Resilient Society, *Advances in Geophysics*. 53 (2012). <http://dx.doi.org/10.1016/B978-0-12-380938-4.00003-3> (accessed August 12, 2012).
- [29] B. Pace, D. Albarello, P. Boncio, M. Dolce, P. Galli, P. Messina, L. Peruzza, F. Sabetta, T. Sanò, F. Visini, Predicted ground motion after the L'Aquila 2009 earthquake (Italy, M w 6.3): input spectra for seismic microzoning, *Bulletin of Earthquake Engineering*. 9 (2011) 199–230. doi:10.1007/s10518-010-9238-y.
- [30] D. Ntokos, P. Ntokou, Defining a safe design distance from tectonic structures in urban and

regional planning, *Cities*. 96 (2020) 102446. doi:10.1016/j.cities.2019.102446.

- [31] N. Chieffo, A. Formisano, Geo-hazard-based approach for the estimation of seismic vulnerability and damage scenarios of the old city of senerchia (Avellino, Italy), *Geosciences* (Switzerland). 9 (2019). doi:10.3390/geosciences9020059.
- [32] S. Santarelli, G. Bernardini, E. Quagliarini, Earthquake building debris estimation in historic city centres: From real world data to experimental-based criteria, *International Journal of Disaster Risk Reduction*. 31 (2018) 281–291. doi:10.1016/j.ijdrr.2018.05.017.
- [33] P.B. Lourenço, D. V. Oliveira, J.C. Leite, J.M. Ingham, C. Modena, F. da Porto, Simplified indexes for the seismic assessment of masonry buildings: International database and validation, *Engineering Failure Analysis*. 34 (2013) 585–605. doi:10.1016/j.engfailanal.2013.02.014.
- [34] D.F. D’Ayala, S. Paganoni, Assessment and analysis of damage in L’Aquila historic city centre after 6th April 2009, *Bulletin of Earthquake Engineering*. 9 (2010) 81–104. doi:10.1007/s10518-010-9224-4.
- [35] T. Rossetto, N. Peiris, J.E. Alarcon, E. So, S. Sargeant, M. Free, V. Sword-Daniels, D. Del Re, C. Libberton, E. Verrucci, P. Sammonds, J. Faure Walker, Field observations from the Aquila, Italy earthquake of April 6, 2009, *Bulletin of Earthquake Engineering*. 9 (2010) 11–37. doi:10.1007/s10518-010-9221-7.
- [36] N. Chieffo, F. Clementi, A. Formisano, S. Lenci, Comparative fragility methods for seismic assessment of masonry buildings located in Muccia (Italy), *Journal of Building Engineering*. 25 (2019). doi:10.1016/j.job.2019.100813.
- [37] V.P. Ezio FACCIOLO, The Catania project: earthquake damage scenarios for a high risk area in the Mediterranean, (n.d.).
- [38] G. Cocco, A.D. Aloisio, E. Spacone, G. Brando, Seismic Vulnerability of Buildings in Historic Centers: From the “ Urban ” to the “ Aggregate ” Scale, 5 (2019) 1–14.

doi:10.3389/fbuil.2019.00078.

- [39] C. Calderini, S. Cattari, S. Lagomarsino, M. Marrè Brunenghi, Performance-based approach to earthquake protection of cultural heritage in European and mediterranean countries, Deliverable D42 - Final Report of the Project to EU Project Office. (2012) 1–47.
- [40] K. Pitilakis, H. Crowley, A.M. Kaynia, SYNER-G: Typology definition and fragility functions for physical elements at seismic risk, buildings, lifelines, transportation networks and critical facilities, Geotech., Springer Netherlands, 2014.
- [41] R. Maio, J.M.C. Estêvão, T.M. Ferreira, R. Vicente, Casting a new light on the seismic risk assessment of stone masonry buildings located within historic centres, Structures. 25 (2020) 578–592. doi:10.1016/j.istruc.2020.03.008.
- [42] E. Anglade, A.-M. Giatreli, A. Blyth, B. Di Napoli, F. Parisse, Z. Namourah, H. Rodrigues, T.M. Ferreira, Seismic damage scenarios for the Historic City Center of Leiria, Portugal: Analysis of the impact of different seismic retrofitting strategies on emergency planning, International Journal of Disaster Risk Reduction. 44 (2020) 101432. doi:10.1016/j.ijdrr.2019.101432.
- [43] F. Rivera, T. Rossetto, J. Twigg, An interdisciplinary study of the seismic exposure dynamics of Santiago de Chile, International Journal of Disaster Risk Reduction. 48 (2020) 101581. doi:10.1016/j.ijdrr.2020.101581.
- [44] R. Ferlito, A. Pizza, Modello di vulnerabilità di un centro urbano. Metodologia per la valutazione speditiva della vulnerabilità della viabilità d'emergenza.pdf, (2010).
- [45] R. Robat Mili, K. Amini Hosseini, Y.O. Izadkhah, Developing a holistic model for earthquake risk assessment and disaster management interventions in urban fabrics, International Journal of Disaster Risk Reduction. 27 (2018) 355–365. doi:10.1016/j.ijdrr.2017.10.022.
- [46] M. Dolce, G. Zuccaro, Progetto: SAVE - Strumenti Aggiornati per la Vulnerabilità sismica del

patrimonio Edilizio e dei sistemi urbani, (2002).

- [47] J.S. Becker, D. Paton, D.M. Johnston, K.R. Ronan, J. McClure, The role of prior experience in informing and motivating earthquake preparedness, *International Journal of Disaster Risk Reduction*. 22 (2017) 179–193. doi:10.1016/j.ijdr.2017.03.006.
- [48] F. Giuliani, A. De Falco, V. Cutini, The role of urban configuration during disasters. A scenario-based methodology for the post-earthquake emergency management of Italian historic centres, *Safety Science*. 127 (2020) 104700. doi:10.1016/j.ssci.2020.104700.
- [49] R. Maio, T.M. Ferreira, R. Vicente, A critical discussion on the earthquake risk mitigation of urban cultural heritage assets, *International Journal of Disaster Risk Reduction*. 27 (2018) 239–247. doi:10.1016/j.ijdr.2017.10.010.
- [50] T. Kalman Šipoš, M. Hadzima-Nyarko, Rapid seismic risk assessment, *International Journal of Disaster Risk Reduction*. 24 (2017) 348–360. doi:10.1016/j.ijdr.2017.06.025.
- [51] M.L. Carreño, O.D. Cardona, A.H. Barbat, New methodology for urban seismic risk assessment from a holistic perspective, *Bulletin of Earthquake Engineering*. 10 (2011) 547–565. doi:10.1007/s10518-011-9302-2.
- [52] A. D’Amico, E. Currà, Urban Resilience and Disaster Preventive Planning. Manage the Preparation to optimize the response in historical towns, in: *Seismic and Energy Renovation for Sustainable Cities*, 2018.
- [53] G. Predari, G. Mochi, R. Gulli, The transformation process of masonry buildings in historic towns: the case of Medicina in northern Italy, *International Journal of the Construction History Society*. 29 (2014) 1–20.
- [54] J.-M. Cariolet, M. Vuillet, Y. Diab, Mapping urban resilience to disasters – A review, *Sustainable Cities and Society*. 51 (2019) 101746. doi:10.1016/j.scs.2019.101746.

- [55] J.S. Chou, S.C. Hsu, C.W. Lin, C.J. Lee, J.L. Wei, Structural analysis of the relationships between implementing tasks and ex-post effectiveness for disaster mitigation practice in Taipei City, *Sustainable Cities and Society*. 34 (2017) 1–11. doi:10.1016/j.scs.2017.06.002.
- [56] M. Polese, M. Di Ludovico, M. Gaetani d'Aragona, A. Prota, G. Manfredi, Regional vulnerability and risk assessment accounting for local building typologies, *International Journal of Disaster Risk Reduction*. 43 (2020) 101400. doi:10.1016/j.ijdr.2019.101400.
- [57] G. Grünthal, European Macroseismic Scale 1998, *European Center of Geodynamics and Sismology*. 15 (1998) 100. <http://scholar.google.com/scholar?hl=en&btnG=Search&q=intitle:European+Macroseismic+Scale+1998#0>.
- [58] R.M.W. Musson, G. Grünthal, M. Stucchi, The comparison of macroseismic intensity scales, *Journal of Seismology*. 14 (2009) 413–428. doi:10.1007/s10950-009-9172-0.
- [59] A. D'Amico, E. Currà, The Role of Urban Built Heritage in Qualify and Quantify Resilience. *Specific Issues in Mediterranean City, Procedia Economics and Finance*. 18 (2014) 181–189. doi:10.1016/S2212-5671(14)00929-0.
- [60] F. Fatiguso, M. De Fino, E. Cantatore, V. Caponio, Resilience of Historic Built Environments: Inherent Qualities and Potential Strategies, *Procedia Engineering*. 180 (2017) 1024–1033. doi:10.1016/j.proeng.2017.04.262.
- [61] S. Wang, K. Gu, Pingyao: The historic urban landscape and planning for heritage-led urban changes, *Cities*. 97 (2020) 102489. doi:10.1016/j.cities.2019.102489.
- [62] A. Formisano, N. Chieffo, M. Mosoarca, Seismic Vulnerability and Damage Speedy Estimation of an Urban Sector within the Municipality of San Potito Sannitico (Caserta, Italy), *The Open Civil Engineering Journal*. 11 (2017) 1106–1121. doi:10.2174/1874149501711011106.

- [63] S. Lagomarsino, S. Giovinazzi, Macro seismic and mechanical models for the vulnerability and damage assessment of current buildings, *Bulletin of Earthquake Engineering*. 4 (2006) 415–443. doi:10.1007/s10518-006-9024-z.
- [64] S. Lagomarsino, S. Podestà, *Inventario e vulnerabilità del patrimonio monumentale dei parchi dell'Italia centro-meridionale e meridionale, Vol.III - Analisi di vulnerabilità e rischio degli edifici monumentali*, L'Aquila, Italy, 2005.
ftp://ftp.ingv.it/pro/gndt/Att%7B_%7Dscient/Prodotti%7B_%7Dconsegnati/Dolce%7B_%7DZuccaro/Task3/SAVE%7B_%7DTask3.pdf.
- [65] A. D'Amico, E. Currà, *La Pianificazione Preventiva ai Disastri nei Centri Storici. Preparare la reazione all'impatto e guidare la ricostruzione*, in: G. Bernardini, E. Di Giuseppe (Eds.), *Colloqui.AT.e 2017. DEMOLITION OR RECONSTRUCTION?*, EDICOM, 2017: pp. 361–375.
- [66] A. Cherubini, *Inventario e Vulnerabilità dei Sistemi Urbani - Analisi di vulnerabilità e rischio sismico delle Reti e dei Sistemi Urbani*, Roma, 2006.
- [67] Commissione tecnica per la microzonazione sismica, *Manuale per l'analisi della condizione limite dell'emergenza (CLE) dell'insediamento urbano*, 1st ed., Roma, 2014.
- [68] T.M. Ferreira, R. Vicente, H. Varum, Seismic vulnerability assessment of masonry facade walls: development, application and validation of a new scoring method, *Structural Engineering and Mechanics*. 50 (2014) 541–561. doi:10.12989/sem.2014.50.4.541.
- [69] M.A. Zanini, F. Faleschini, P. Zampieri, C. Pellegrino, G. Gecchele, M. Gastaldi, R. Rossi, Post-quake urban road network functionality assessment for seismic emergency management in historical centres, *Structure and Infrastructure Engineering*. 13 (2017) 1117–1129. doi:10.1080/15732479.2016.1244211.
- [70] C. Gavarini, Seismic risk in historical centers, *Soil Dynamics and Earthquake Engineering*. 21

(2001) 459–466. doi:10.1016/S0267-7261(01)00027-6.

- [71] N. Hirokawa, T. Osaragi, Earthquake disaster simulation system : Integration of models for building collapse, road blockage, and fire spread, *Journal of Disaster Research*. 11 (2016) 175–187. doi:10.20965/jdr.2016.p0175.
- [72] S. Santarelli, G. Bernardini, E. Quagliarini, M. D’Orazio, New Indices for the Existing City-Centers Streets Network Reliability and Availability Assessment in Earthquake Emergency, *International Journal of Architectural Heritage*. 12 (2018) 153–168. doi:10.1080/15583058.2017.1328543.
- [73] S. Shapira, L. Aharonson-Daniel, I.M. Shohet, C. Peek-Asa, Y. Bar-Dayana, Integrating epidemiological and engineering approaches in the assessment of human casualties in earthquakes, *Natural Hazards*. 78 (2015) 1447–1462. doi:10.1007/s11069-015-1780-0.
- [74] P. Mouroux, B. Le Brun, Presentation of RISK-UE Project, *Bulletin of Earthquake Engineering*. 4 (2006) 323–339. doi:10.1007/s10518-006-9020-3.
- [75] N. Emori, T. Izumi, Y. Nakatani, A Support System for Developing Tourist Evacuation Guidance, in: H.K. Kim, M.A. Amouzegar, S. Ao (Eds.), *Transactions on Engineering Technologies*, Springer Singapore, Singapore, 2016: pp. 15–28. doi:10.1007/978-981-10-0551-0_2.
- [76] Federal Emergency Management Agency (FEMA), Developing and maintaining emergency operations plans, *Comprehensive Preparedness Guide 101*. (2010) 1–124.
- [77] J. Coutinho-Rodrigues, N. Sousa, E. Natividade-Jesus, Design of evacuation plans for densely urbanised city centres, *Proceedings of the Institution of Civil Engineers - Municipal Engineer*. 169 (2016) 160–172. doi:10.1680/jmuen.15.00005.
- [78] M. Mori, H. Tsukaguchi, A new method for evaluation of level of service in pedestrian facilities, *Transp. Res.* 21A(3) (1987) 223–234.

- [79] T. Klüpfel, H. Meyer-König, PedGo Guardian: an assistant for evacuation decision making, in: U. Weidmann, U. Kirsch, M. Schreckenberg (Eds.), *Pedestrian and Evacuation Dynamics* 2012, Springer International Publishing, 2014: pp. 445–454. <http://books.google.it/books?id=AmG4BAAQBAJ&pg=PA447&lpg=PA447&dq=level+of+service+evacuation&source=bl&ots=7-8yYdAqZt&sig=uH9UXiNyQqA1AcmEQh38aqUq5ws&hl=it&sa=X&ei=TIRnVKzHBYSv ygO-w4GoCw&ved=0CF4Q6AEwBw#v=onepage&q=level of service evacuation&f=false>.
- [80] J.L.P. Aguado, T.M. Ferreira, P.B. Lourenço, The Use of a Large-Scale Seismic Vulnerability Assessment Approach for Masonry Façade Walls as an Effective Tool for Evaluating, Managing and Mitigating Seismic Risk in Historical Centers, *International Journal of Architectural Heritage*. 12 (2018) 1259–1275. doi:10.1080/15583058.2018.1503366.
- [81] M. Hashemi, A.A. Alesheikh, GIS: agent-based modeling and evaluation of an earthquake-stricken area with a case study in Tehran, Iran, *Natural Hazards*. 69 (2013) 1–23. doi:10.1007/s11069-013-0784-x.
- [82] Federal Emergency Management Agency, Multi-hazard Loss Estimation Methodology. Earthquake model. Hazus–MH 2.0. Technical manual, 2003.
- [83] G. Bernardini, M. D’Orazio, E. Quagliarini, L. Spalazzi, An Agent-based Model for Earthquake Pedestrians’ Evacuation Simulation in Urban Scenarios, *Transportation Research Procedia*. 2 (2014) 255–263. doi:10.1016/j.trpro.2014.09.050.